



2L

Steam Solenoid Valve

2L Series

Steam solenoid Valve



Ordering Code

2L	170	15	AC110V
Specification	Orifice Size	Port Size	Standard Voltage
2L: 2/2 Way for Steam	170: 17 mm 200: 22 mm 300: 30 mm 500: 50 mm	15: 1/2" 35: 1 1/4" 20: 3/4" 40: 1 1/2" 25: 1" 50: 2"	DC12V DC24V AC24V AC110V AC220V

Specification



Model	2L170-15	2L170-20	2L200-25	2L300-35	2L300-40	2L500-50
Working Medium	Air, Water, Steam					
Operation	Direct					
Type	Normal Close					
Orifice	17 mm		22 mm	30 mm		50 mm
CV Value	4.8		12	20		48
Port Size	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
Working pressure	1 ~ 15 Bar					
Max. Ambient Temperature	-10 ~ 180 °C					
Material of Body	Brass					
Material of Oil Seal	PTFE					
Power Consumption	AC24V/ 110V/ 220V: 85VA DC12V/ 24V: 44W					
Coil	2L COIL DC12V/ 2L COIL DC24V/ 2L COIL AC24V/ 2L COIL AC110V/ 2L COIL AC220V					

2L Series

Steam solenoid Valve

Overall Dimension

2L Series

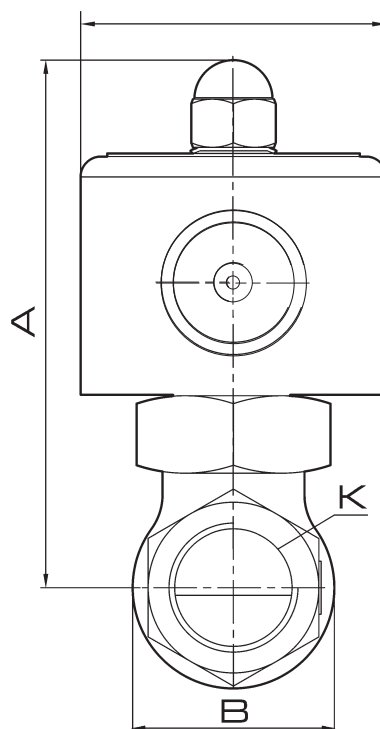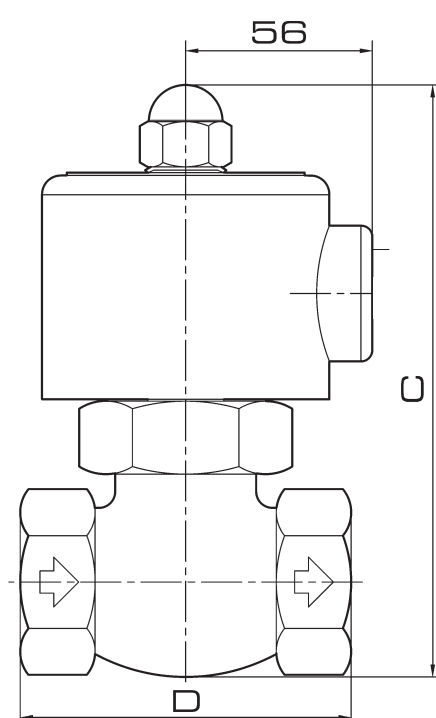

Dimension

Model	A	B	C	D	K
2L170-15	128	42	145	81	G1/2"
2L170-20	128	48	148	81	G3/4"
2L200-25	130	54	156	91	G1"
2L300-35	148	76	185	113	G1 ¹ / ₄ "
2L300-40	148	76	185	113	G1 ¹ / ₂ "
2L500-50	171	91	216	168	G2"