



OC

Regulator filter and lubricator

OC Series

Regulator filter and lubricator

AKME
SOLUÇÕES EM AUTOMAÇÃO



Ordering Code

OC

2010

02

D

Standard

Port Size

Size

Drain Type

OC: 2 Combination

2010

02: 1/4"

Blank: Hand

4010

04: 1/2"

D: Automatic

5010

10: 1"

Specification


Model	OC2010-02	OC4010-04	OC5010-10
Rated Flow	1000 l/min	2600 l/min	8000 l/min
Port Size	1/4	1/2	1
Filter Precision		25 µm	
Max. Adjustable Pressure		12 Bar	
Proof Pressure Resistance		16 Bar	
Operating Temperature Range		5 ~ 60 °C	
Range of Adjustable Pressure		0.5 ~ 12 Bar	
Recommended Lubricant		ISO VG 32	
Container Material		Poly Carbonate	
Protective Cup Cover		Iron	
Drain Function	Differential Drain	Semi-automatic Drain, Automatic Drain	
Valve Type	With Overflow		

OC Series

Regulator filter and lubricator

Overall Dimension

OC Series

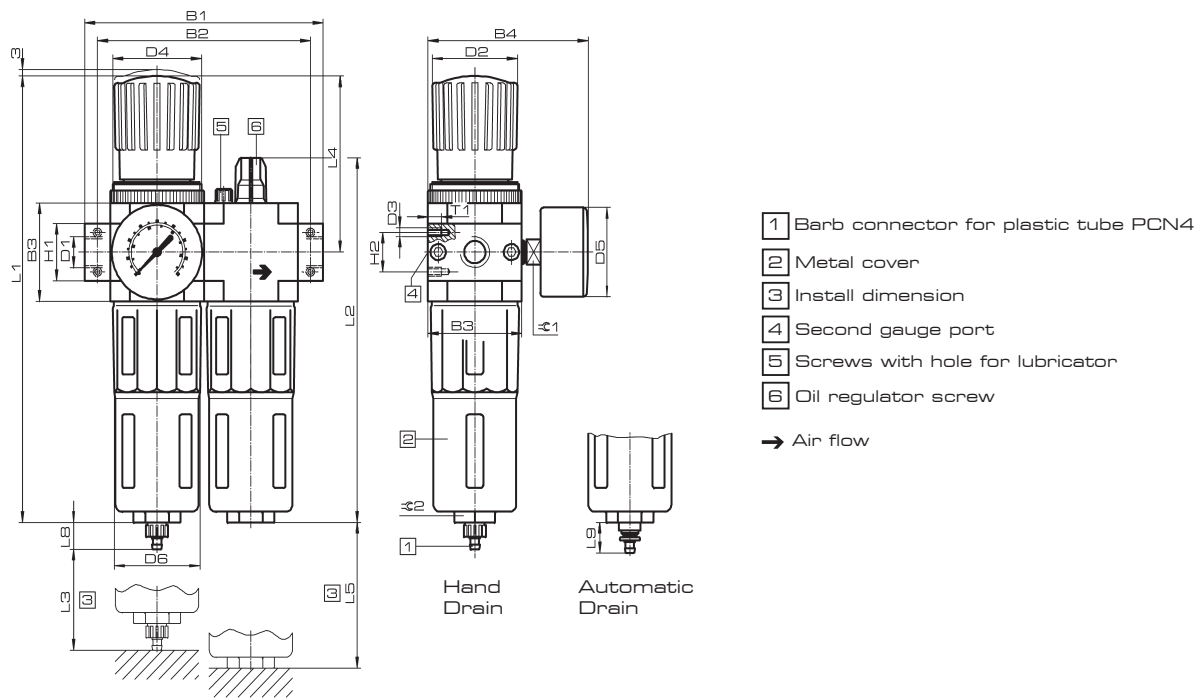

Dimension

Model	B1	B2	B3	B4	D1	ØD2	D3	D4	ØD5	ØD6
Mini										
OC2010-02	104	92	40	76	1/4	31	M4	M36x1.5	41	38
Midi										
OC4010-04	140	125	55	95	1/2	50	M5	M52x1.5	50	52
Maxi										
OC5010-10	182	157	66	107	1	31	M5	M52x1.5	50	65

Model	H1	H2	L1	L2	L3	L4	L5	L8	L9	T1	∠C1	∠C2
Mini												
OC2010-02	20	11	193	169	60	69	100	15	19	7	14	22
Midi												
OC4010-04	32	22	250	204	80	99	120	15	19	8	14	24
Maxi												
OC5010-10	40	22	252	228	90	82	150	15	19	8	14	24