



XK

Pneumatic Ball Vibrator

XK Series

Pneumatic Ball Vibrator



Features

- Vibration intensity according to the pressure regulator, affordable, long life, safe an be used in damp dust and explosion sites.
- Feed material conveyor, vibrating screening, vibrating hopper, to help fill packaging, foundry sand mold vibration.
- Means of precision steel sleeve and the ball, the outer shell sealed by a special aluminum alloy to promote the use of air charged into the rotary sleeve in the steel ball weigh ball and the distance between the center of the centrifugal force generated vibration

Specification


Model	Frequency (V.PM)			Centrifugal force (N)			Air consumption (l/min)		
	2 Bar	4 Bar	6 Bar	2 Bar	4 Bar	6 Bar	2 Bar	4 Bar	6 Bar
XK-8	25000	30500	35000	130	260	360	83	145	195
XK-10	22500	27000	34000	250	470	710	92	150	200
XK-13	15000	18500	22500	320	550	870	94	158	225
XK-16	13000	17000	19500	450	800	1100	122	200	280
XK-20	10000	14500	16500	720	1220	1720	130	230	340
XK-25	9200	12200	14000	930	1570	2050	160	290	425
XK-32	7800	9700	12500	1510	2470	3210	215	375	570
XK-36	7300	9000	10000	2060	3150	4050	260	475	675

XK Series

Pneumatic Ball Vibrator

Overall Dimension

XK Series

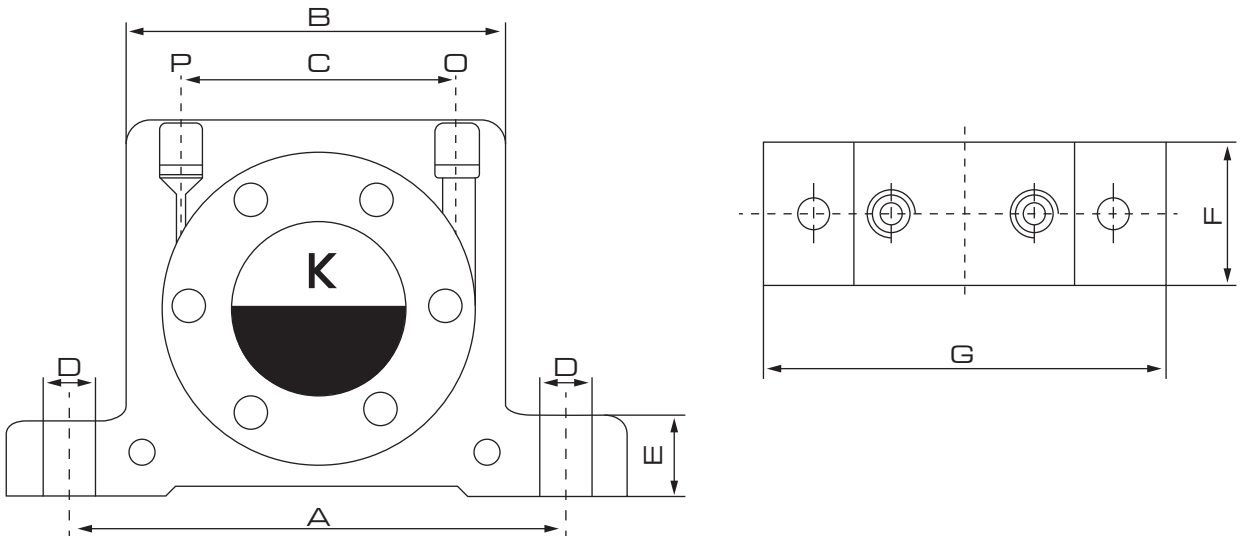

Dimensions

Model	A	B	C	D	E	F	G	P/O
XK-8	68	50	28	7	12	35	86	1/4
XK-10	68	50	28	7	12	35	86	1/4
XK-13	90	65	39	9	16	43	113	1/4
XK-16	90	65	39	9	16	43	113	1/4
XK-20	104	82	56	9	17	56	128	1/4
XK-25	104	82	56	9	17	56	128	1/4
XK-32	130	103	76	11	21	73	160	3/8
XK-36	130	103	76	11	21	73	160	3/8