



OL

Lubricator (16 Bar)

OL Series

Lubricator (16 Bar)



Ordering Code

OL	2000	02
I	I	I
Standard	Port Size	Size
OL: 2 Combination	2000	02: 1/4"
	4000	04: 1/2"
	5000	10: 1"

Specification


Model	OL2000-02		OL4000-04	OL5000-10
Rated Flow	2300 l/min		6100 l/min	9000 l/min
Port Size	1/4		1/2	1
Filter Precision			25 µm	
Max. Adjustable Pressure			12 Bar	
Proof Pressure Resistance			16 Bar	
Operating Temperature Range			5 ~ 60 °C	
Range of Adjustable Pressure			0,5 ~ 12 Bar	
Recommended Lubricant			ISO VG 32	
Container Material			Poly Carbonate	
Protective Cup Cover			Iron	
Drain Function	Differential Drain	Semi-automatic Drain, Automatic Drain		
Valve Type	With Overflow			

OL Series

Lubricator (16 Bar)

Overall Dimension

OL Series

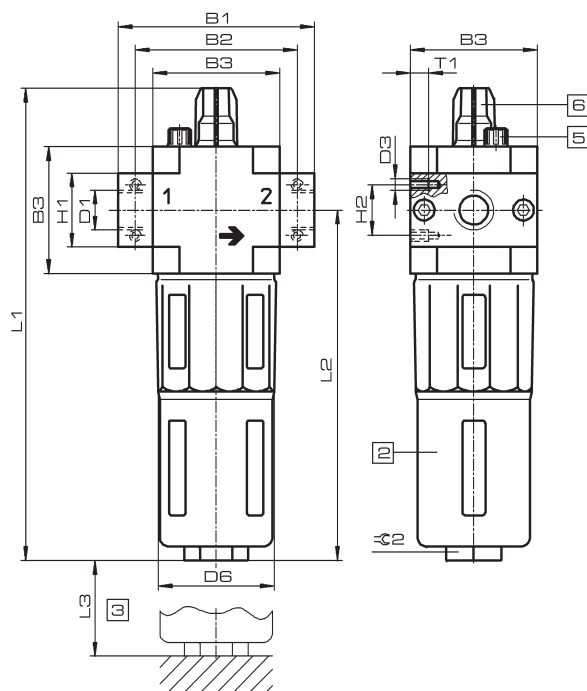

2 Metal cover

5 Screws with hole, for lubricator

3 Install dimension

6 Oil regulator Screw

→ Air flow

Dimension

Model	B1	B2	B3	B4	B5	D1	ØD2	D3	ØD6	H1	H2	L1	L2	L3	T1	T2	≡C 2
Mini																	
OL2000-02	70	52	40	30	-	1/4	-	M4	38	20	11	169	124	100	7	-	22
Midi																	
OL4000-04	85	70	55	43	-	1/2	-	M5	52	32	22	204	151	120	8	-	24
Maxi																	
OL5000-10	116	91	66	46	-	1	-	M5	65	40	22	228	170	150	8	-	24