



Q22HD

Pneumatic Operation valve

Q22HD

Pneumatic operation valve

AKME
SOLUÇÕES EM AUTOMAÇÃO



Ordering Code

Q22HD

25

Series Code

Bore

15

20

25

40

50

Feature

Low starting pressure of the valve, close the high sensitivity, good sealing performance, any imports direction.

Category deadline, plate, single and double acting control structure. Now widely used in food, medicine, industry, washing, petrochemical, metallurgy, spray, vehicles and other machinery and equipment.

Specification


Model	Q22HD-15	Q22HD-20	Q22HD-25	Q22HD-40	Q22HD-50
Nominal Diameter	15	20	25	40	50
Bore	G1/2	G3/4	G1	G1 1/2	G2
Working Medium	Air, water, oil, liquefied petroleum gas, lighter viscosity fluid				
Working pressure	2 ~6 Bar				
Medium and Ambient Temp.	-5~60°C, -5~150°C				
Coefficient Values	4	5	10	25	40

Q22HD


Pneumatic operation valve

Overall Dimension

Q22HD

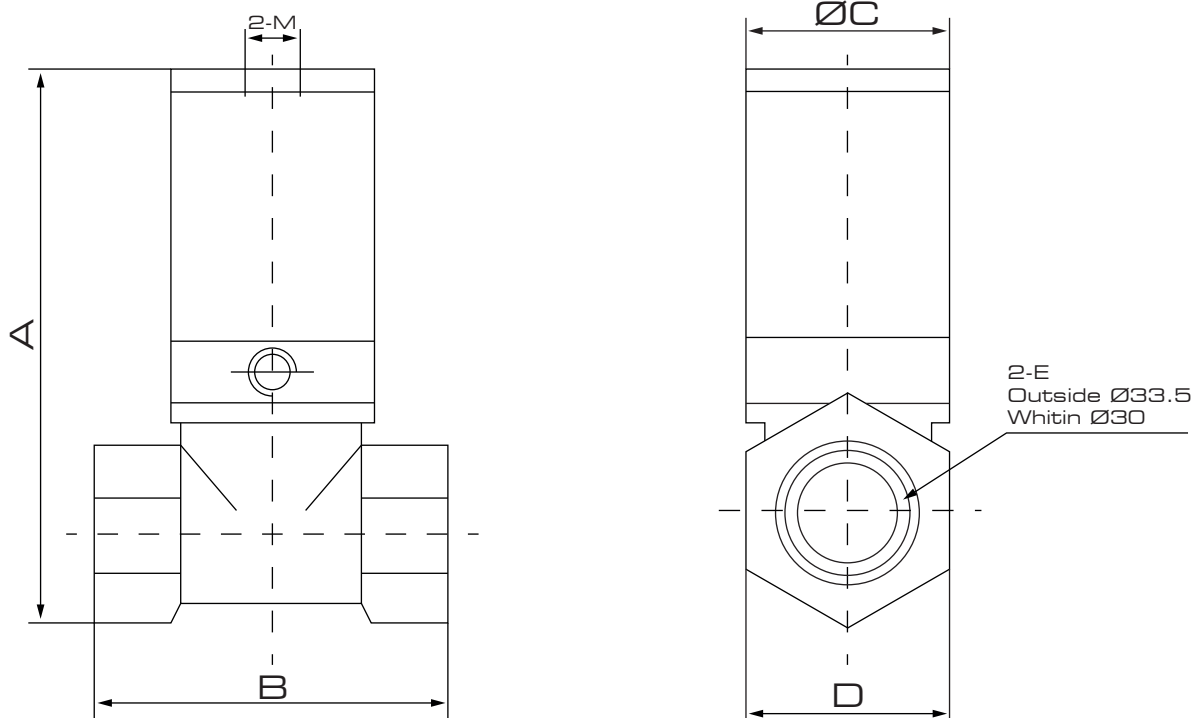

Symbol

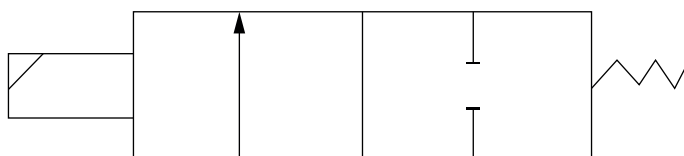

Dimension

Model	A	B	C	D	M	E	G
Q22HD-15	96	47	31	26	G1/8	G1/2	250
Q22HD-20	102	54	31	33	G1/8	G3/4	330
Q22HD-25	115	66	38	39.5	G1/8	G1	490
Q22HD-40	160	86	54	54	G1/8	G1 1/2	1050
Q22HD-50	182	116	67	67	G1/8	G2	1680