



XGT

Pneumatic Gear Vibrator

XGT Series

Pneumatic Gear Vibrator



Features

- Vibration intensity can be adjusted based on air pressure, can immediately start, stop, fast, low-noise, vibration force, security.
- Feed material conveyor, vibrating screening, vibrating hopper, to help fill packing, foundry sand mold vibration.
- Copper eccentric gear installed counterweight impact ai intake charge into the gear thrust gear rotates, the eccentric rotation of the centrifugal weight with vibration, the gear driven by a bearing, low noise.

Specification


Model	Frequency (V.PM)			Vibration power (N)			Air consumption (l/min)		
	2 Bar	4 Bar	6 Bar	2 Bar	4 Bar	6 Bar	2 Bar	4 Bar	6 Bar
XGT-8	34850	42000	45500	980	2100	2800	46	80	112
XGT-10	27500	35000	37500	840	1390	2400	46	80	112
XGT-13	26000	30000	33000	1400	2440	3730	120	200	290
XGT-16	17000	21500	24000	1220	2090	3160	120	200	290
XGT-20	17000	20000	23000	2170	4040	5520	185	325	455
XGT-25	12000	15500	17000	2120	3510	5070	185	325	455
XGT-32	13000	14000	16000	3380	5430	7540	330	530	745
XGT-36	7800	10000	13000	3300	5000	7150	330	530	745
XGT-40	7500	8800	9500	4350	7350	9850	408	428	680
XGT-48	5800	7500	9700	4950	7750	10600	408	428	680
XGT-60	4758	6530	8515	5700	9800	11150	505	600	920

XGT Series

Pneumatic Gear Vibrator

Overall Dimension

XGT Series

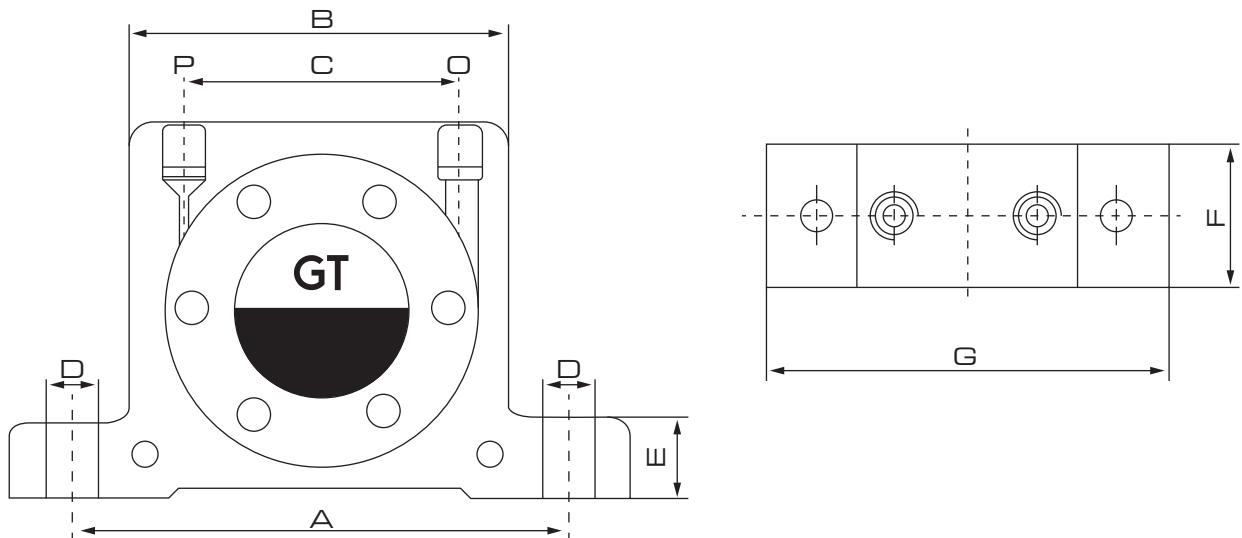

Dimensions

Model	A	B	C	D	E	F	G	P/O
XGT-8	68	50	28	7	12	35	86	1/8
XGT-10	68	50	28	7	12	35	86	1/8
XGT-13	90	65	39	9	16	43	113	1/4
XGT-16	90	65	39	9	16	43	113	1/4
XGT-20	104	82	56	9	17	56	128	1/4
XGT-25	104	82	56	9	17	56	128	1/4
XGT-32	130	103	76	11	21	73	160	3/8
XGT-36	130	103	76	11	21	73	160	3/8
XGT-40	152	122	85	18	27	80	194	3/8
XGT-48	152	122	85	18	27	80	194	3/8
XGT-60	195	140	96	21	30	95	240	1/2