



OF
Air Filter

OF Series

Air Filter

AKME
SOLUÇÕES EM AUTOMAÇÃO



Ordering Code

OF

Standard

OF: 2 Combination

2000

Port Size

2000

4000

5000

02

Size

02: 1/4"

04: 1/2"

10: 1"

D

Drain Type

Blank: Hand

D: Automatic

Specification


Model	OF2000-02	OF4000-04	OF5000-10
Rated Flow	1400 l/min	3400 l/min	10000 l/min
Port Size	1/4	1/2	1
Filter Precision	25 µm		
Max. Adjustable Pressure	12 Bar		
Proof Pressure Resistance	16 Bar		
Operating Temperature Range	5 ~ 60 °C		
Range of Adjustable Pressure	0.5 ~ 12 Bar		
Recommended Lubricant	ISO VG 32		
Container Material	Poly Carbonate		
Protective Cup Cover	Iron		
Drain Function	Differential Drain	Semi-automatic Drain, Automatic Drain	
Valve Type	With Overflow		

OF Series

Air Filter

Overall Dimension

OF Series

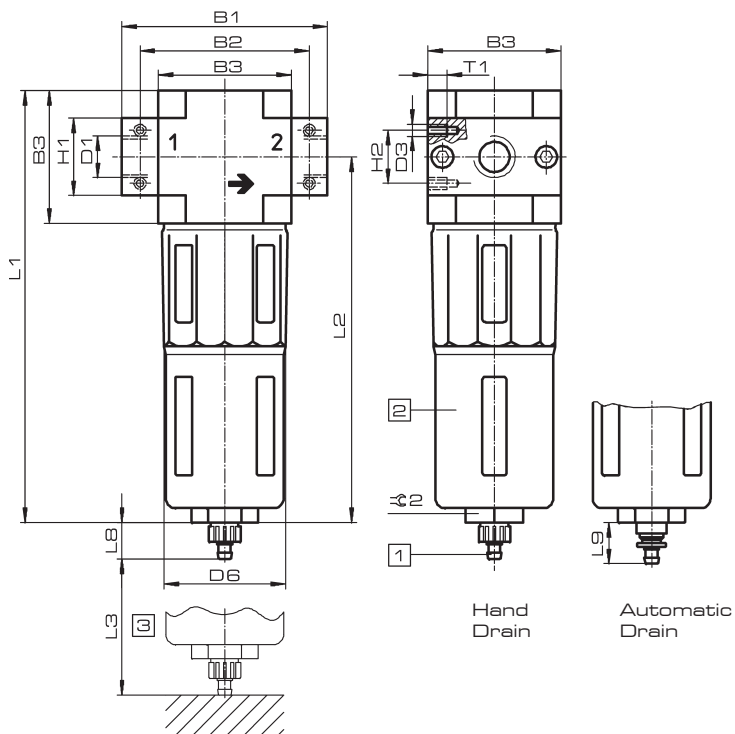

1 Barb connector for plastic tube PCN-4

2 Metal cover

3 Install dimension

→ Air flow

Dimension

Model	B1	B2	B3	D1	D3	ØD6	H1	H2	L1	L2	L3	L8	L9	T1	T2	±2
Mini																
OF2000-02	70	52	40	1/4	M4	38	20	11	144	124	60	15	19	7	-	22
Midi																
OF4000-04	85	70	55	1/2	M5	52	32	22	179	151	80	15	19	8	-	24
Maxi																
OF5000-10	116	91	66	1	M5	65	40	22	203	170	90	15	19	8	-	24